



UPRIGHT FREEZER



- Ventilated System
- Magnetic Solid Door





BS 2DUF/Z
2 Door



BS 4DUF/Z
4 Door



BS 6DUF/Z
6 Door

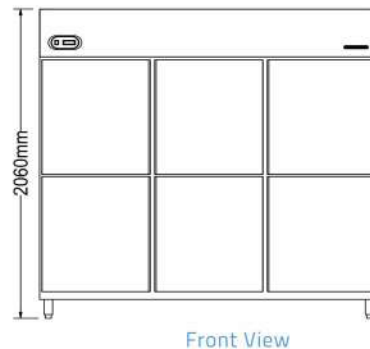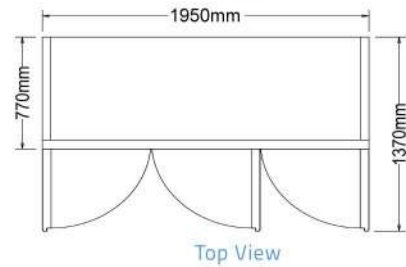

BERJAYA STEEL PRODUCT SDN BHD

HIGHLIGHTS

High-density Cyclo-isopentane Polyurethane

insulated body saves energy.

Automatic defrost system

saves energy consumption and provide shortest possible defrost cycle.

Minimum wattage heater for body

to avoid condensation at lowest energy rate.

Large cooling coil heater,

saves energy with short defrost cycle.

Ventilated system (assisted with fan)

will ensure homogenous coolness in the storage space.

Magnetic and robust stainless steel door.

Offer a higher tensile strength, which means fewer dents and scratches.

Environmentally friendly refrigerant

(CFC and HCFC Free) R404a.

Effective counter - balanced weight system self

closing door provides smooth, even, positive closure.

127 ~ 152mm adjustable stainless steel legs

or 100mm castor wheel.

4 tier removable and adjustable shelves.

Self contained system

no plumbing required.

Tested at ambient temperature of 38°C,

with no load.

TABLE INFO



	2 DOOR	4 DOOR	6 DOOR
MODEL	BS 2DUF/Z	BS 4DUF/Z	BS 6DUF/Z
Temperature°C (celsius)	-20 to -14	-20 to -14	-20 to -14
External Dimension (mm)	650 x 770 x 2060	1300 x 770 x 2060	1950 x 770 x 2060
Gross Volume (Litres)	505	1103	1701
Voltage/ Frequency (V/ Hz)	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz	230V/1/50Hz 220V/1/60Hz
Cooling Capacity (W)	680	876	1112
Wattage (W)	580 - 620	931 - 1029	1235 - 1365
Ampere (A)	2.70 - 2.78	4.8 - 5.3	6.2 - 6.8
Refrigerant	R404a	R404a	R404a
Defrost System	Electric Heater	Electric Heater	Electric Heater
Weight (kg)	102	165	228
Unit For 20ft Container	23	11	7
Unit For 40ft Container	48	23	15