

GELATO SHOWCASE



White(W)



Grey(G)




Red(R)



Blue(B)



Orange(O)

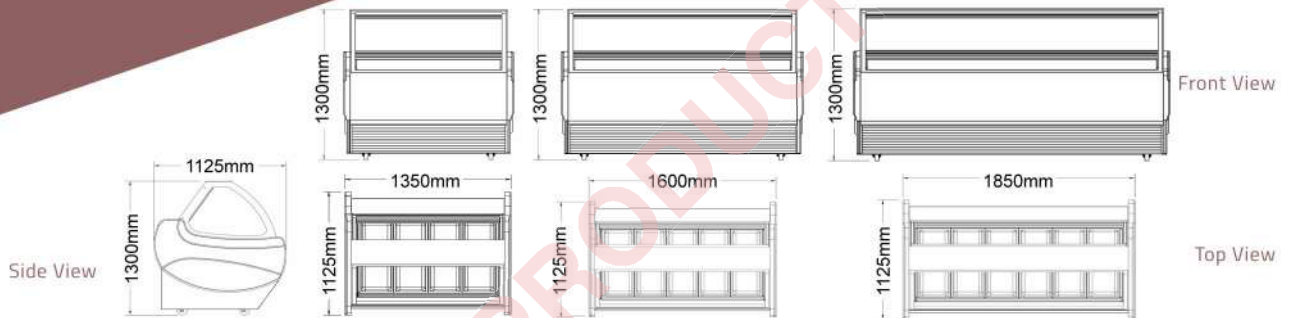

HIGHLIGHTS

4 sides clear glasses

with front curved glass and internal lighting for excellent display.

Automatic defrost system

saves energy consumption and provide shortest possible defrost cycle.

Refrigeration system protected from corrosion

by urethane-treated evaporator coil.

Ventilated system (assisted with fan)

will ensure homogenous coolness in the storage space.

Environmental friendly refrigerant

(CFC and HCFC Free) R134a.

Tested at ambient temperature of 29°C,

with no load.

TABLE INFO



MODEL	GS08	GS10	GS12
Temperature°C (Celsius)	-20 to -25	-20 to -25	-20 to -25
External Dimension (mm)	1350 x 1125 x 1300	1600 x 1125 x 1300	1850 x 1125 x 1300
No Of Pan	8	10	12
Size Of Pan (mm)	360 x 250 x 80 (FP - ICS - 1/2 - 3)	360 x 250 x 80 (FP - ICS - 1/2 - 3)	360 x 250 x 80 (FP - ICS - 1/2 - 3)
Voltage/ Frequency (V/ Hz)	220 - 240V/50Hz 220 - 230V/60Hz	220 - 240V/50Hz 220 - 230V/60Hz	220 - 240V/50Hz 220 - 230V/60Hz
Compressor (Hp)	1 1/2 Hp	1 1/2 Hp	1 Hp x 2
Cooling Capacity (W)	1673	1732	1262 x 2
Wattage (W)	1330 - 1470	1520 - 1680	2166 - 2394
Ampere (A)	5.7 - 6.3	6.6 - 7.4	10.4 - 11.6
System	Force Convection (Ventilated System)	Force Convection (Ventilated System)	Force Convection (Ventilated System)
Refrigerant	R404	R404	R404
Unit For 20ft Container	4 (with wooden case)	4 (with wooden case)	4 (with wooden case)
Unit For 40ft Container	9 (with wooden case)	9 (with wooden case)	9 (with wooden case)

As product improvement is an on going process, we reserve the right to change specifications or design without notice.